


REV.	ECN. NO.	APPD.
X3		

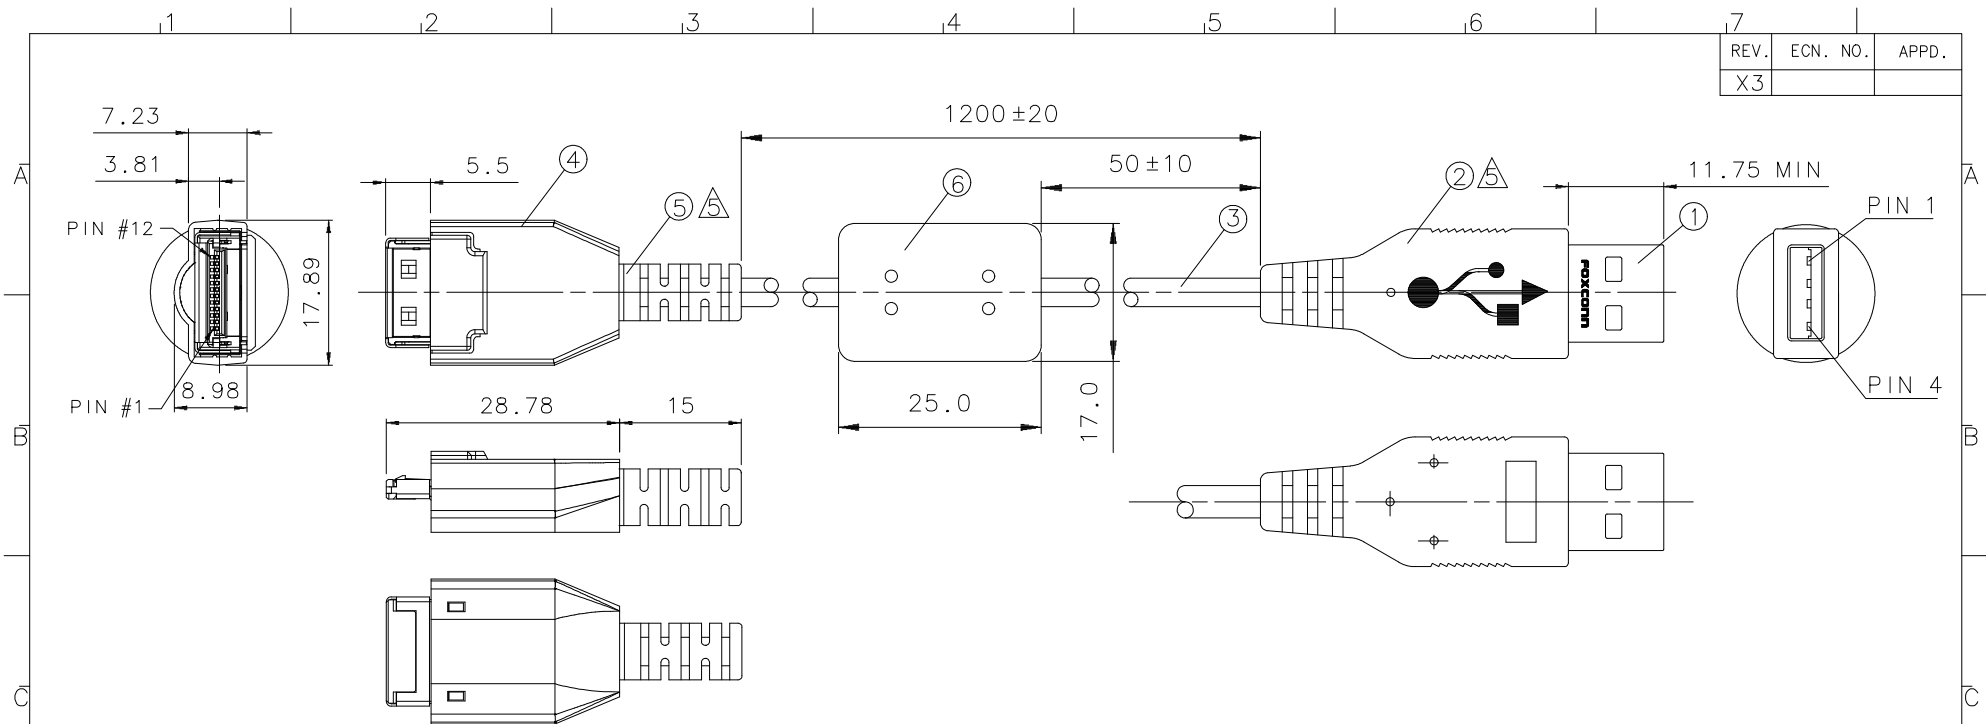

CONNECTION		
STRATAC		USB
9	RED	1
12	WHITE	2
11	GREEN	3
4	BLACK	
10		4
SHELL		SHELL

NOTE:

1. SPECIFICATION:

1.1 OPERATING VOLTAGE : 30 VAC

1.2 OPERATING CURRENT : 1AMP MAX

1.3 OPERATING TEMPERATURE : 0° TO 40° c

2. INSULATION RESISTANCE : 2M ohm / 500VDC

3. OPEN SHORT MISWIRE 100% TEST.

△ CABLE : 28AWGX1 PAIR+26AWGX2C+AL-MYLAR +BARID
JACKET PVC COLOR BLACK OD ø5.0 mm.

△ CABLE TERMINATION: THE COPPER BRAID SHIELD SHALL BE TO THE CONN SHELL AT BOTH ENDS.

6	CORE	1	020-0001-629	45P PVC.UL 94V-0
5	STRAIN RELIEF	1	005-0001-126	45P PVC.UL 94V-0
4	STRATAC 12P PLUG	2	365-0001-014	
3	RAW CABLE	1	015-0032-453	SHOW AS △
2	USB "A" OVERMOLD	1	005-0000-003	45P PVC.UL 94V-0
1	USB A TYPE PLUG CONN	1	UB2010C-07	COLOR BLACK
No	DESCRIPTION	Q'TY	P/N	REMARKS
X.	±	X°	±	UNITS mm
.X	± 0.35	.X°	±	MAT'L
.XX	± 0.25	.XX°	±	FINISH
.XXX±	.XXX°±			Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.				NAME (INTENDED USE)
				MANUFACTURING
				PART NO. (INTENDED USE)
				CQV12D04UB4-01
				APPD:
				CHKD:
				DR: KEVIN PING 3-1-'2000
				TITLE: STRATAC 12P TO USB "A" CABLE ASS'Y
				DWG NO.:
				605-0000-646
				SCALE SHEET REV.
				NONE 1/1 X3